


## Continuous Cord Loop Replacement Instructions from Fix My Blinds.com

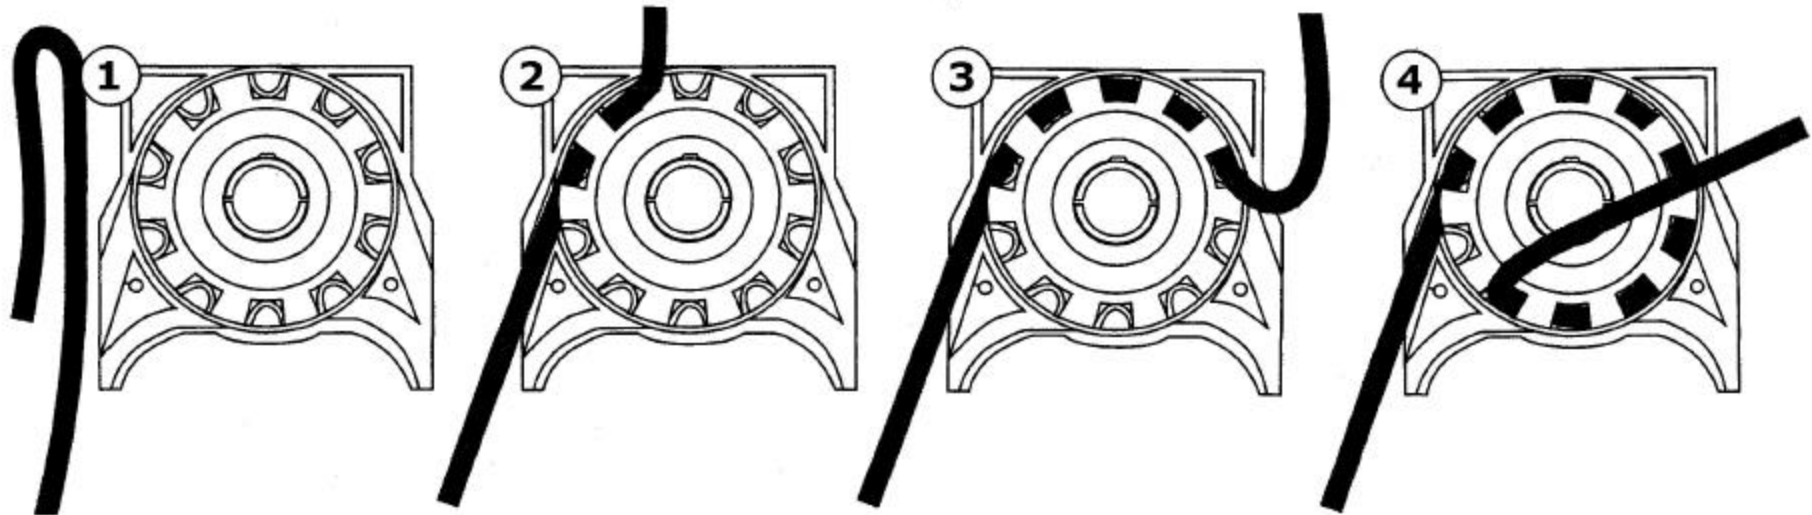

Replacing a continuous cord loop is one of the simplest repairs that we offer.

First, remove the blind from its brackets. This is usually accomplished by pushing on the head rail from the front side and then tilting down. Sometimes there is a small tab on the backside of the brackets, near the bottom that you can release to free up the rail.

Next, remove the cover of the cord loop mechanism (the side that the cord goes through). This is either done with a small thin screwdriver or butter knife. Gently pry the end cap off, being very careful not to break it. Some models have 2 small Phillips head screws that hold the cover on. Remove them with a small Phillips screwdriver first.

Once the cover is off, remove the old cord if you have not done so already. Then take the new cord and guide it onto the gears or teeth of the mechanism (SEE DIAGRAM 6 1-5). I like to compare it to putting the chain back on the sprocket of your bicycle when you were a kid. Reattach the cover on the mechanism and install the screws if they came with the cover.

Rehang the shade and test it out. It should now operate just like new.

